

Maritim hose for wet exhaust SAE J2006




Product group	140
Cover design	Corrugated
Color	Black
Bundled pipes/hoses	1
Media description	Ventilation, Water
Safety factor	1:3
Antstatic wire	No
Cover tube material	EPDM
Flat coil	No
Inner tube material	EPDM
Certificate	Lloyds Registry of Shipment
Max temperature (°C)	120
Reinforcement layers	No extra reinforcement
Reinforcement mtrls	Steel wire, Textile
Min temperature (°C)	-30

Marine diesel and exhaust hose according to SAE J2006 R1 and R2. Resistent to water, wet exhaust gases, ozone and UV-abrasion. Low weight with corrugated cover. The steel spiral and the design of the hose make it very flexible. Approved by Lloyds Register of Shipping 02/00029

Part no	Bend radius (mm)	Working pressure (MPa)	ID (mm)	Vacuum pr. Max%	Length metre per coil	OD (mm)	Weight (kg)
14347020	48	0.4	32	80	40	40	0.65
14347024	60	0.4	40	80	40	50	0.89
14347028	68	0.4	45	80	40	55	1
14347032	78	0.4	51	80	40	61	1.13
14347035	86	0.3	57	80	40	67	1.25
14347039	90	0.3	60	80	40	70	1.31
14347040	95	0.3	65	80	40	73	1.39
14347048	115	0.3	76	80	40	87	1.61
14347056	135	0.2	90	80	40	101	2.11
14347064	155	0.2	102	80	20	112	2.35
14347069	167	0.2	110	80	20	122	2.82
14347080	190	0.2	127	80	20	139	3.18
14347096	230	0.2	152	80	20	165	4.16
14347203	305	0.2	203	80	20	218	6.54



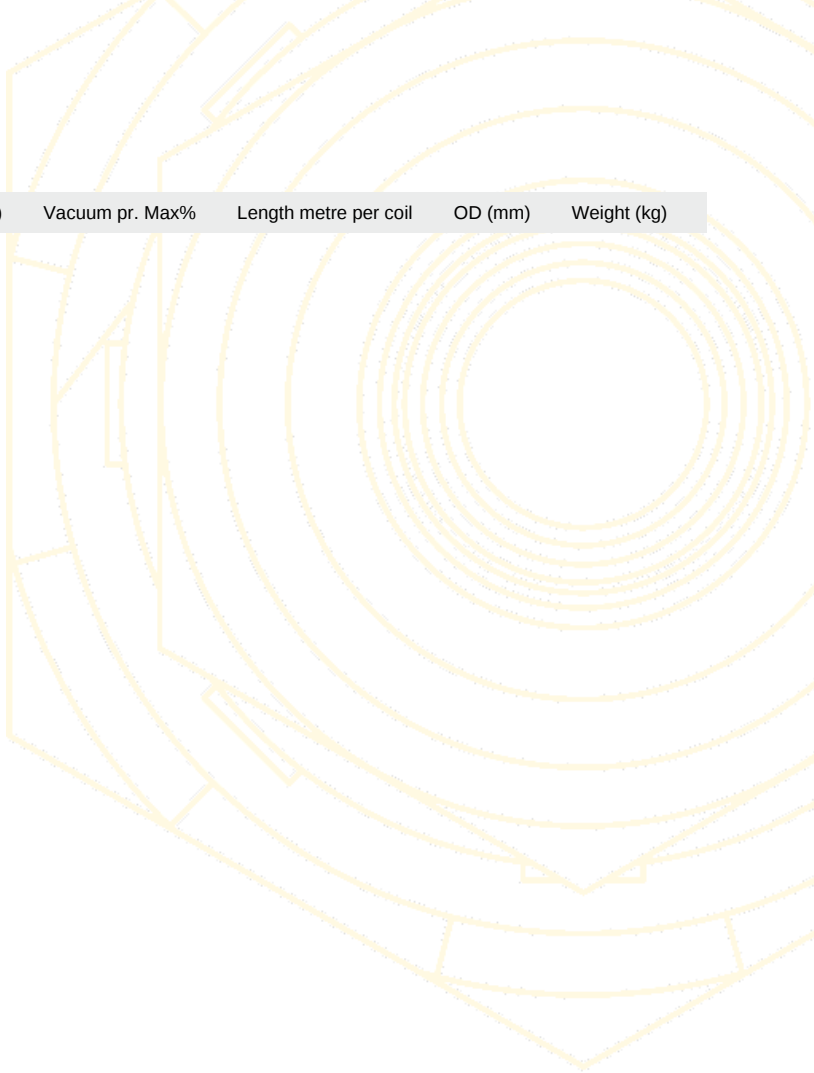

Part no	Bend radius (mm)	Working pressure (MPa)	ID (mm)	Vacuum pr. Max%	Length metre per coil	OD (mm)	Weight (kg)
---------	------------------	------------------------	---------	-----------------	-----------------------	---------	-------------

