


WELDARC, WELDING HOSE EN 559 ISO 3821 20 BAR

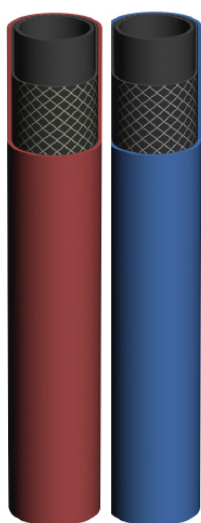

Product group	140
Cover design	Smooth
Safety factor	1:3
Bundled pipes/hoses	1
Antstatic wire	No
Cover tube material	SBR/EPDM
Flat coil	No
Inner tube material	SBR
Max temperature (°C)	60
Reinforcement layers	1
Reinforcement mtrls	PE
Min temperature (°C)	-20

This welding hose is suitable for all types of aggregates, high ignition temperature and low diffusion. It is very good air pressure hose and flexible even in low temperatures. According to the latest European Norm ISO 3821.

Part no	Color	Bend radius (mm)	Working pressure (MPa)	ID (mm)	Length metre per coil	OD (mm)	Weight (kg)
14400103	Red	50	2	5	50	12	0.13
14400104	Red	60	2	6.3	50	13.3	0.15
14400105	Red	80	2	8	50	15	0.18
14400106	Red	100	2	10	50	17	0.2
14400203	Blue	50	2	5	50	12	0.13
14400204	Blue	60	2	6.3	50	13.3	0.15
14400205	Blue	80	2	8	50	15	0.18
14400206	Blue	100	2	10	50	17	0.2

