


Polyurethane hose L 0.4



Product group	140
Color	Transparent
Cover design	Corrugated
Bundled pipes/hoses	1
Media description	Materials
Antstatic wire	No
Cover tube material	PUR
Flat coil	No
Inner tube material	PUR
Max temperature (°C)	90
Reinforcement layers	No extra reinforcement
Reinforcement mtrls	Steel wire
Min temperature (°C)	-40

A very light weighted hose delivered in a "compact"-package. The hose is very durable and suitable for the food and pharmaceutical industries. Areas of usage: Ventilation, pellet burner, oil mist. The hose is resistant to hydrolysis and microbes.

Part no	Bend radius (mm)	Vacuum pr. Max%	ID (mm)	Length metre per coil	OD (mm)	Weight (kg)
15632032	26	16	51	6	56	0.18
15632040	32	14	63	6	68	0.22
15632048	38	10	76	6	81	0.3
15632050	40	10	82	6	87	0.32
15632055	45	7	90	6	95	0.35
15632064	51	7	102	6	107	0.41
15632070	55	7	110	6	115	0.44
15632073	57	7	115	6	120	0.46
15632080	64	7	127	6	132	0.5
15632085	70	5	140	6	145	0.55
15632096	76	5	152	6	157	0.78
15632130	65	5	130	6	135	0.68
15632160	80	5	160	6	165	0.69
15632170	85	5	170	6	175	0.73
15632180	90	5	180	6	185	0.91
15632203	102	5	203	6	208	1.05
15632228	115	5	228	6	233	1.13
15632254	127	2	254	6	259	1.25
15632300	150	2	300	6	305	1.3

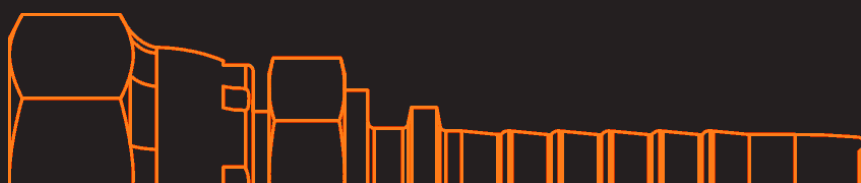

Part no	Bend radius (mm)	Vacuum pr. Max%	ID (mm)	Length metre per coil	OD (mm)	Weight (kg)
15632305	153	2	305	6	310	1.34
15632318	158	2	315	6	320	1.38
15632325	163	2	325	6	330	1.42
15632350	175	2	350	6	355	1.53
15632400	200	2	400	6	405	1.74
15632408	205	2	408	6	413	2.1
15632630	425	1	630	6	635	4.22

