




<b>Color</b>	Yellow
<b>Cover tube resistance</b>	Abrasion, Oil, Weather
<b>Safety factor</b>	1:4
<b>Bundled pipes/hoses</b>	1
<b>Cover tube material</b>	PU
<b>Max temperature (°C)</b>	100
<b>Reinforcement layers</b>	1
<b>Reinforcement mtrls</b>	Steel wire
<b>Min temperature (°C)</b>	-40

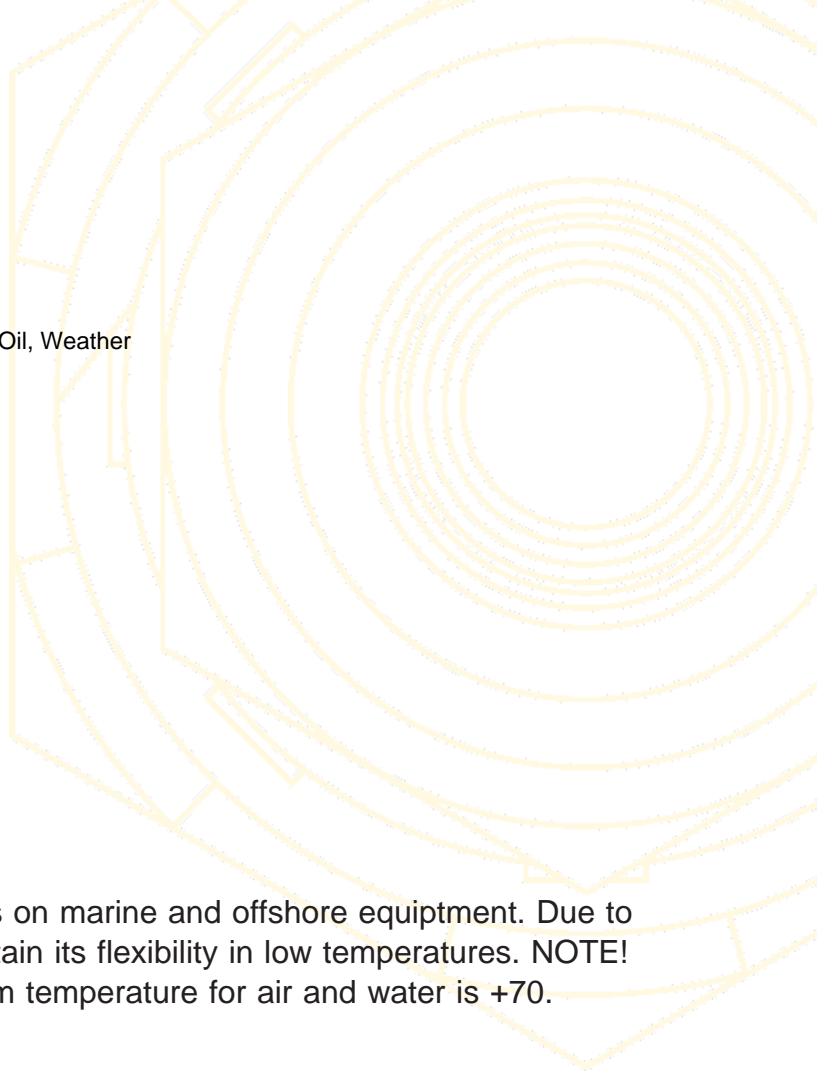

Recommended for high pressure hydraulics on marine and offshore equipment. Due to the inner tube of polyester, the hose will retain its flexibility in low temperatures. **NOTE!** The hose is NOT pin-pricked. The maximum temperature for air and water is +70.

Part no	ID (inch)	ID (mm)	OD (mm)	Working pressure (MPa)	Bend radius (mm)	Weight (kg)
10640106Y	3/8"	10	16.5	22.5	65	0.1

