




|                              |                     |
|------------------------------|---------------------|
| <b>Color</b>                 | Black               |
| <b>Cover design</b>          | Wrapped             |
| <b>Safety factor</b>         | 1:3                 |
| <b>Inner tube resistance</b> | Heat                |
| <b>Media description</b>     | Water               |
| <b>Antstatic wire</b>        | No                  |
| <b>Cover tube material</b>   | EPDM                |
| <b>Flat coil</b>             | No                  |
| <b>Inner tube material</b>   | EPDM                |
| <b>Max temperature (°C)</b>  | 125                 |
| <b>Reinforcement mtrls</b>   | Steel wire, Textile |
| <b>Min temperature (°C)</b>  | -40                 |



| Part no  | Bend radius (mm) | Working pressure (MPa) | ID (mm) | Vacuum pr. Max% | Length metre per coil | OD (mm) | Weight (kg) |
|----------|------------------|------------------------|---------|-----------------|-----------------------|---------|-------------|
| 14098508 | 50               | 1                      | 13      | 90              | 40                    | 21      | 0.32        |
| 14098512 | 70               | 1                      | 19      | 90              | 40                    | 28      | 0.51        |
| 14098514 | 85               | 1                      | 22      | 90              | 40                    | 33      | 0.55        |
| 14098516 | 95               | 1                      | 25      | 90              | 40                    | 34      | 0.61        |
| 14098520 | 125              | 1                      | 32      | 90              | 40                    | 42      | 0.96        |
| 14098524 | 150              | 1                      | 38      | 90              | 40                    | 48      | 1.13        |
| 14098532 | 215              | 1                      | 51      | 90              | 40                    | 62      | 1.69        |

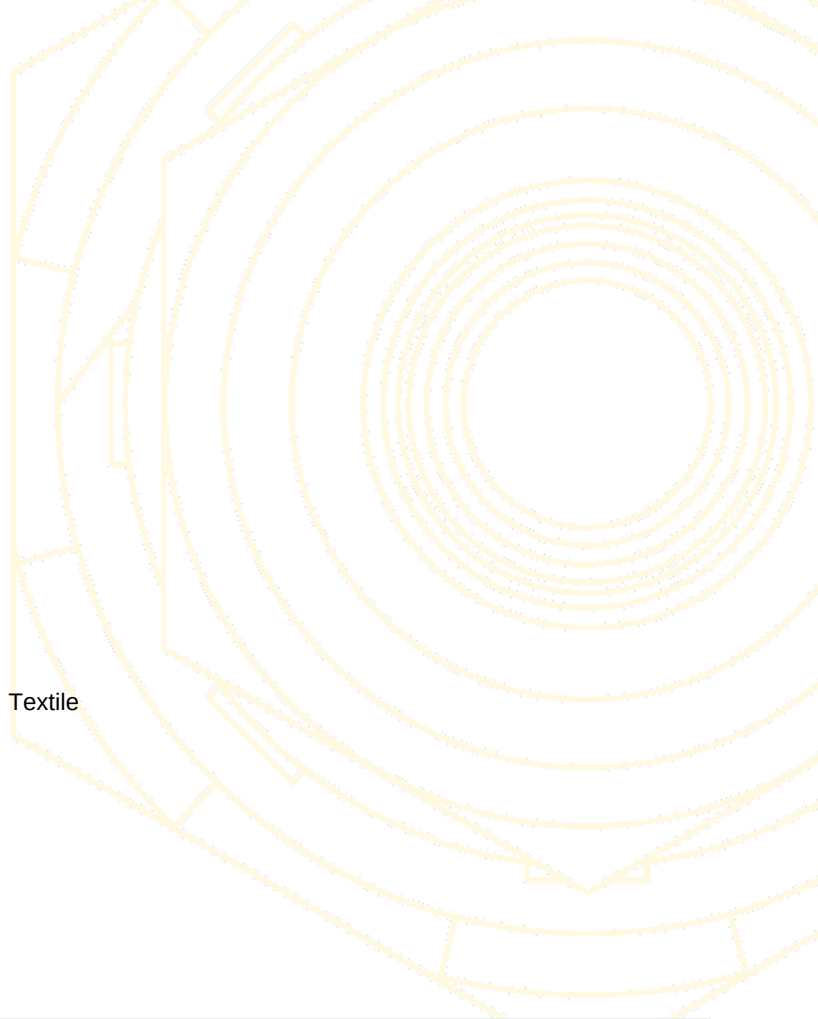